## Jersey Jack Pinball



DATE: June 1, 2019 GAME: Pirates of the Caribbean Pinball SUBJECT: Post Update Kit.

The updates detailed in this JJP Service Bulletin should be made to your Pirates of the Caribbean game to prevent damage to the main playfield clear coat and artwork, around the lower sling posts.

## Tools & Materials Required:

1) 6 clear, plastic star posts (supplied)

- 2) 6 black, nylon washers, 0.49" OD (supplied)
- 3) 6 black, nylon washers, 0.75" OD (supplied)
- 4) 5/16" and 11/32" nutdrivers
  5) #2 Phillips screwdriver
  6) 6. Hele addressed back
- 6) Switch adjustment tool

## Instructions:

1) Using an 11/32" nutdriver, remove the two locknuts holding lower right sling plastic in place (see picture below, left). Remove silicone ring from sling posts.

2) Using a 5/16" nutdriver, remove two corner (upper and lower) sling posts.


3a) *If there is no (or minimal) damage to the PF around these posts,* add a 0.49" OD black washer under the posts and firmly reattach them to the PF. Ensure that each post remains centered on its washer as you tighten it down (see picture below, center).

3b) *If PF damage around these posts is more significant,* replace the original posts with star posts. Add 0.75" OD black washers underneath and firmly attach them to the PF. Ensure that each post remains centered on its washer as you tighten it down (see picture below, right). Check and readjust your sling switches as necessary.

4) Optionally, you may add a 0.49" OD black washer to the third corner (back) sling post. Use a #2 Phillips screwdriver to remove the post. Add washer and firmly reattach post to PF; keep post centered on its washer.

5) Replace rubber ring, sling plastic and two locknuts. Leave locknuts slightly loose, to allow plastic movement.

6) Repeat above steps for lower left sling.

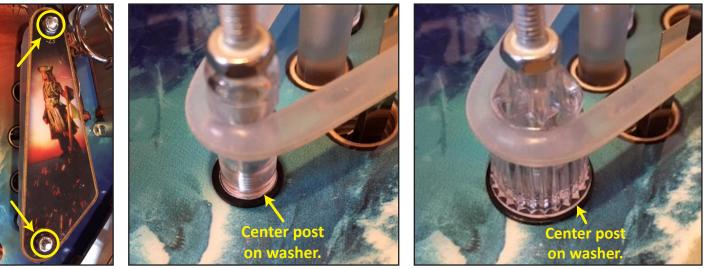

1645 Oak Street, Lakewood, New Jersey 08701 Tel: 732-364-9900 For questions or comments, please contact JJP Technical Support: **techsupport@jerseyjackpinball.com** 

or